

# **Rear dump truck**

**GVW 5.5-8.5t**



**Light duty**




**Medium duty**

The vehicle in the photographs include optional equipments, special coloring and processing.

# Simple mechanism with high durability


## ■ Features

### Penetrated body deck frames and cross members



Kyokuto original penetrated cross member structure improves impact resistance and high durability.

### Electro-deposition under coating

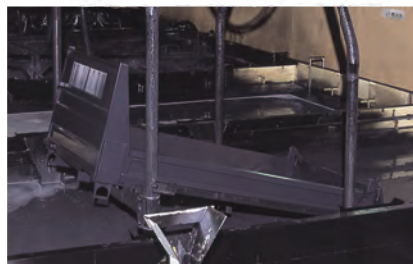

Bodies are coated with an electro-deposition process to enhance rust prevention effects.

## ■ Specifications

Model	Body inside dimension(mm)			Body capacity (m <sup>3</sup> )	Tipping angle	GVW (kg)
	Length	Width	Height			
DD02	3,000	1,600	320	1.5	60 degrees	5,500
DD04	3,400	2,045	370	2.5		8,500

The above mentioned figures are approximate.

Note : Specifications and the other contents on this catalogue are subject to change without prior notice due to product improvement.  
Product photos on this catalogue might include optional devices.

## ***Kyokuto Kaihatsu Kogyo Co.,Ltd.***

TOKYO OFFICE  
3-15-10 ,Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan  
Telephone : +81(3)5781-9828 Facsimile : +81(3)5781-3438  
E-mail : web-overseas@kyokuto.com  
<http://www.kyokuto.com/>