


● SPECIFICATIONS

Equipment Model		GB240-25	GB160-25	GB42-25-S	GB65-25-S	GB80-25-S	GB100-25-S	GB120-25-S
Loading System		Pressing and Packing Motion with Hydraulic Controlled Single-Plate						
Loading Time/One Cycle	s	25	25	10~11	10~12	14~16	14~16	14~16
Discharging System		Horizontal Pushing						
Approx. Discharging Time	s	30	30	20	20	25	25	25
Body Length	mm	6,130	4,290	2,295	2,995	2,950	3,580	4,200
Body Width	mm	2,280	2,280	1,735	1,980	2,055	2,055	2,055
Body Height	mm	1,940	1,940	1,330	1,330	1,660	1,660	1,660
Body Capacity	m ³	24.0	16.0	4.2	6.5	8.0	10.0	12.0
Hopper Capacity	m ³	2.3	2.3	0.6	0.65	1.05	1.05	1.05
Loading Port Width	mm	2,000	2,000	1,420	1565	1,670	1,670	1,670
Loading Port Height	mm	1,450	1,450	780	780	860	860	860
Sewage Tank Capacity	L	150	150	72	80	100	100	100

● DRAWINGS

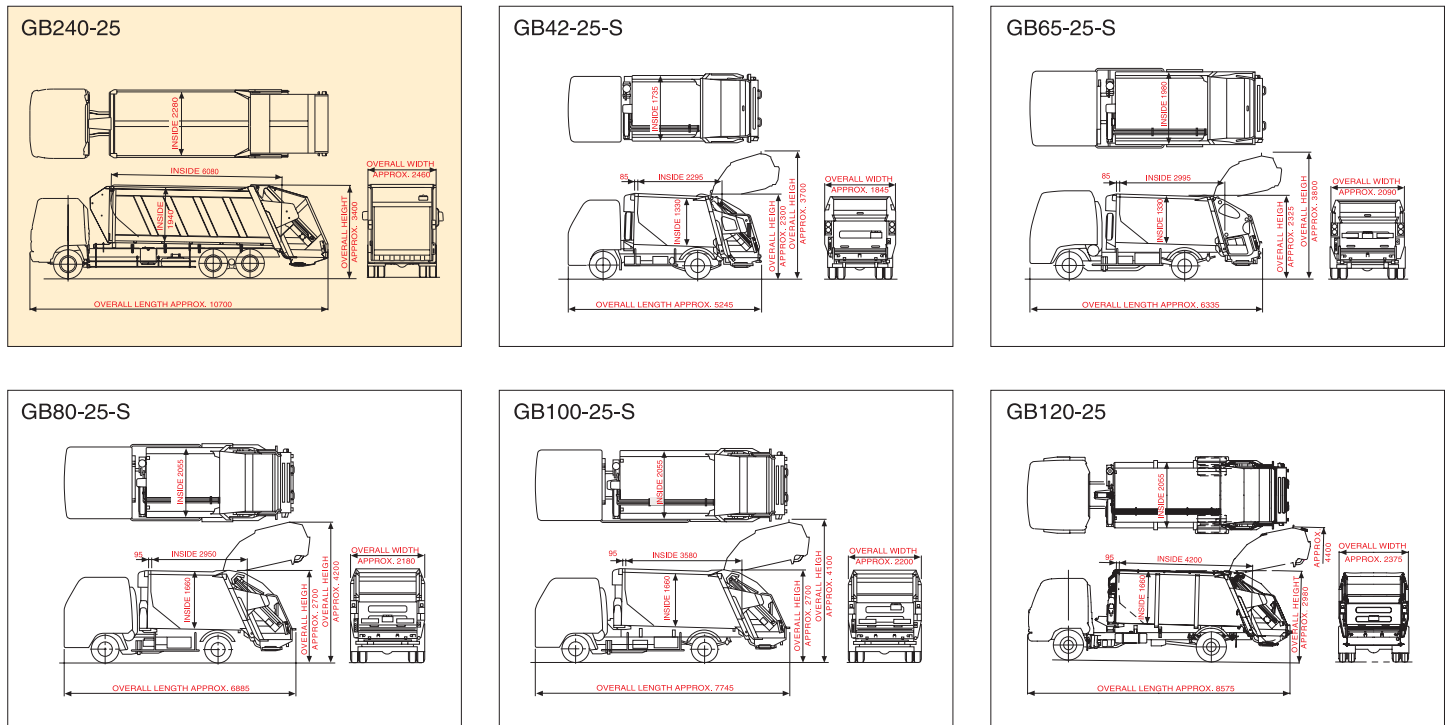

CAUTIONS:
SPECIFICATIONS SUBJECT TO CHANGE FOR IMPROVEMENT WITHOUT NOTICE

GB65-25-S



KYOKUTO KAIHATSU KOGYO CO., LTD.

HEAD OFFICE

1-45, Koshienguchi 6-Chome, Nishinomiya, Hyogo-Ken, 663, Japan
Telephone : (0798) 66-1000. Facimile : (0798) 65-7353

TOKYO OFFICE

1-1, Haneda Asahicho, Ohta-ku, Tokyo, 144-0042, Japan
Telephone : +813-5737-2273 Facimile : +813-5737-7793
E-mail : export@kyokuto.com
<http://www.kyokuto.com/>